

# BT 100-1000

HIGH DENSITY POLYURETHANE INSULATION

CAPACITIES: 100 - 150 - 200 - 250 - 500 - 750 - 1000 L




## SPECIFICATIONS

MODEL*	INSTALLATION	CAPACITY L	HEATING EFFICIENCY CLASS
BT 100 M	WALL HUNG	100	C
BT 100	FLOOR	100	
BT 150	FLOOR	150	
BT 200	FLOOR	200	
BT 250	FLOOR	250	
BT 500	FLOOR	505	-
BT 750	FLOOR	750	
BT 1000	FLOOR	1000	

(\*) BT models are sent with their wall or floor brackets.

## DIMENSIONS

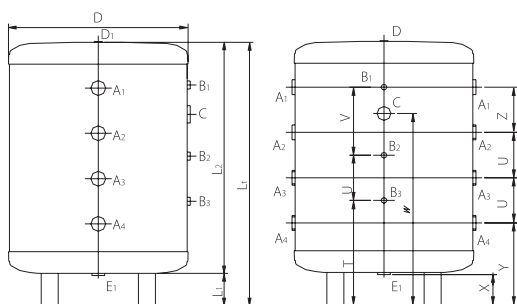


BT 100 a 250

### Buffer tank dimensions

	BT 100	BT 100 M	BT 150	BT 200	BT 250
D mm	581	581	581	581	581
L <sub>1</sub> mm	105	105	105	105	105
L <sub>2</sub> mm	747	747	1,027	1,327	1,627
L <sub>3</sub> mm	852	852	1,132	1,432	1,732
T mm	338	338	380	435	485
U mm	146	146	230	340	440
V mm	230	230	375	510	660
W mm	619	619	864	1,114	1,364
X mm	98	98	98	98	98
Y mm	265	265	265	265	265
Z mm	146	146	260	340	340

### Diameters

	BT 100	BT 100 M	BT 150	BT 200	BT 250
A <sub>1</sub> -A <sub>4</sub> mm	1 1/4" H	1 1/4" H	1 1/4" H	1 1/4" H	1 1/4" H
B <sub>1</sub> -B <sub>3</sub> mm	1/2" H	1/2" H	1/2" H	1/2" H	1/2" H
C <sub>1</sub> mm	1 1/2" H	1 1/2" H	1 1/2" H	1 1/2" H	1 1/2" H
D <sub>1</sub> mm	3/4" H	3/4" H	3/4" H	3/4" H	3/4" H
E <sub>1</sub> mm	1" H	1" H	1" H	1" H	1" H

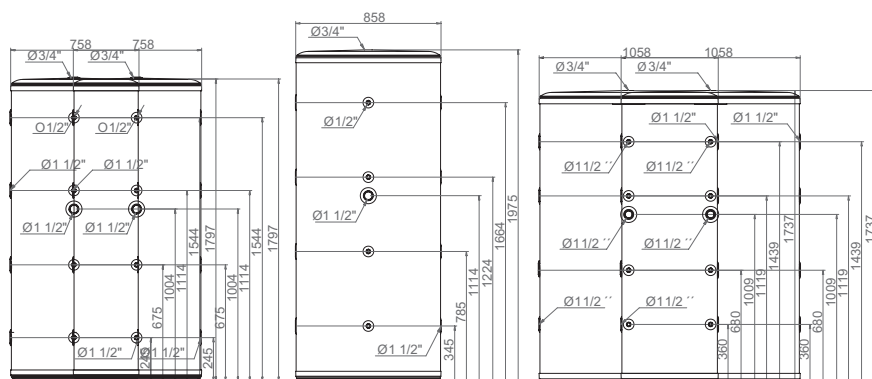

BT 500

BT 750

BT 1000