

CLIMA PLUS H CLIMA PLUS HFD

STEEL OR CAST IRON HEAT EXCHANGER

COMBI BOILER

1 VERSION: HEATING AND INSTANTANEOUS DHW

CLIMA PLUS H: 1 POWER 28 kW

CLIMA PLUS HFD: 1 POWER 29 kW



SPECIFICATIONS

MODEL	HEATING OUTPUT	DHW PRODUCTION L/min	HEATING EFFICIENCY CLASS	DHW EFFICIENCY CLASS	LOAD PROFILE
	kW	ΔT30°C			
CLIMA PLUS H	26.5	12.2	B	B	XL
CLIMA PLUS HFD 30	28.1	12.5			XL

OPTIONS


Analog daily timer

Flue kit (only CLIMA PLUS HFD)


EQUIPMENT

Burner	Safety thermostat	Check valve
Heating pump	ON/OFF switch	Heat exchanger
Expansion vessel	Filling valve	Min. thermostat heating
Pressure relief valve	Connection room thermostat	Max. thermostat DHW
Automatic air vent	Oil filter	DHW flow limit valve
Thermometer	Hose for feed and return line	Drain cock
Pressure gauge	Summer/winter switch	Connectors
Heating control thermostat	Diverter valve	

DIMENSIONS

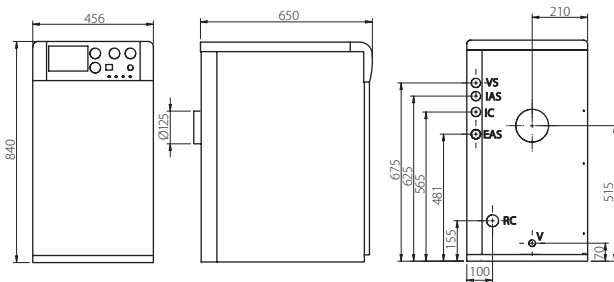

CLIMA PLUS H

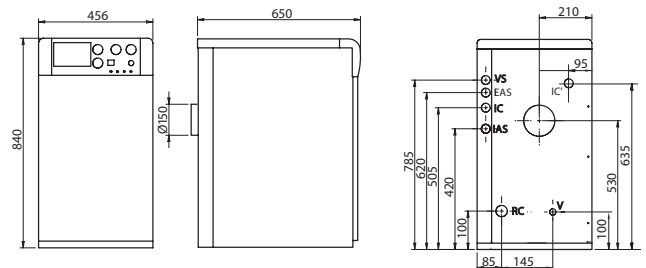

CLIMA PLUS HFD-30

VS: Pressure relief valve 1/2"
IC: Heating outlet 3/4"
EAS: DHW inlet 1/2"
IAS: DHW outlet 1/2"
RC: Heating return 3/4"
V: Drain cock

PRESSURE RELIEF VALVE TARE (kg/cm ²)	3
BOILER TEST PRESSURE (kg/cm ²)	4.5
POWER SUPPLY VOLTAGE (50 Hz)	220V

VS: Pressure relief valve 1/2"
IC: Heating outlet 3/4"
EAS: DHW inlet 1/2"
IAS: DHW outlet 1/2"
RC: Heating return 3/4"
V: Drain cock
IC': Optional heating outlet

PRESSURE RELIEF VALVE TARE (kg/cm ²)	3
BOILER TEST PRESSURE (kg/cm ²)	4.5
POWER SUPPLY VOLTAGE (50 Hz)	220V